


colorPol® Polarizer

colorPol® VIS 500 BC3 CW01

| | |
|--|--------------------------|
| Spectral range | VIS |
| Wavelength range with contrast > 1 000 : 1 ⁽¹⁾ | 475 to 625 nm |
| Transmittance (antireflection coating, 0° incident angle) | > 58 % up to 90 % |
| Filter thickness ⁽²⁾ | 280 ± 50 µm |
| Acceptance angle (coating reference for 0°) | ± 20° |
| Polarization axis | < 0.5° to indicated edge |
| Operating temperature | -50 to +400 °C |
| ⁽¹⁾ contrast: ratio of parallel to perpendicular transmittance ⁽²⁾ other thicknesses on request | Date: 07.02.2013 |

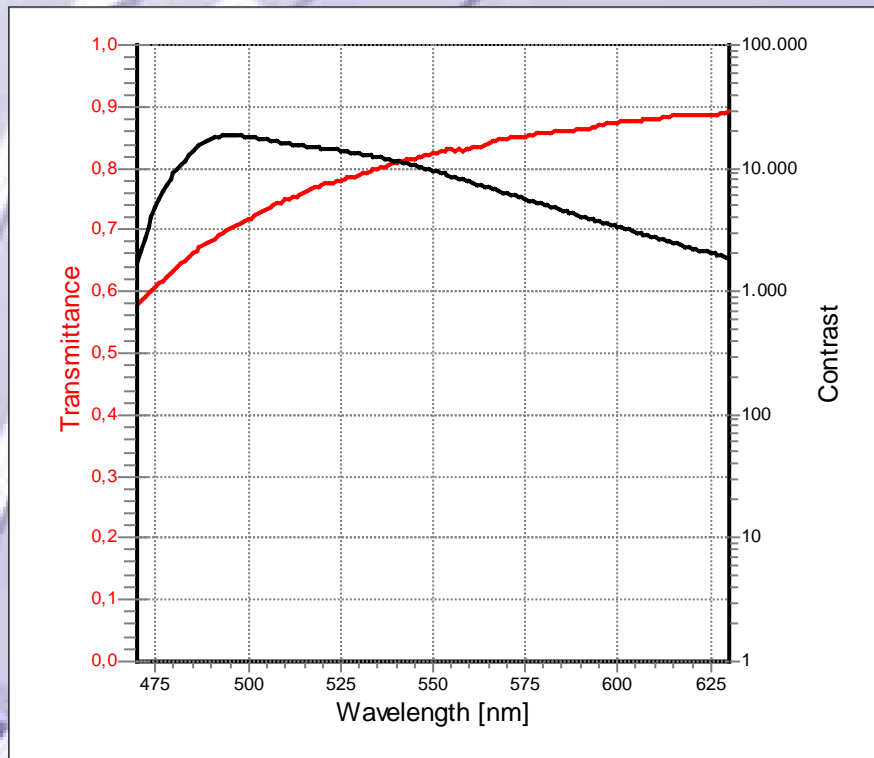

CODIXX AG

Steinfeldstraße 3
D-39179 Barleben
Germany

Phone: +49 39203 963 0
Fax: +49 39203 963 33
Email: colorpol@codixx.de
Internet: www.codixx.de

Version 1.4 – 12/09/2004